

ABRASIVE WHEELS

Abrasive Wheel

Nonmetallic wheel is 1" thick with a 6" outside diameter. Nonwoven nylon flaps coated with a fine aluminum oxide abrasive are edge-bonded to the wheel's fiber core. For use at up to 3400 rpm.

Wheel has 75 mats bonded to its core.

5345-00-157-9790 Maroon EA **\$10.60**

Abrasive Wheel (Depressed Center)



Aluminum oxide depressed-center wheel grinds and deburrs mild steel and nonferrous metals. ANSI B 74.2.

Wheel is grade U, with a grain size of 24 and a resinoid-reinforced bond type. Has a 7" diameter, 1/4" thickness and 7/8" arbor hole diameter.

5130-00-049-7912 EA **\$2.62**

CLOTH/PAPER

Aluminum Oxide Cloth

For woodworking and metal working, this aluminum oxide cloth has a hard, sharp, artificial abrasive; closed coat.

Has a drill cloth backing.

Grit size 60.

5350-00-253-4393 PG (contains 50 EA) **\$23.82**

Has a jean cloth backing.

Grit size 80.

5350-00-192-5047 PG (contains 50 EA) **\$18.09**

Grit size 100.

5350-00-161-9066 PG (contains 50 EA) **\$18.09**

Grit size 120.

5350-00-192-5049 PG (contains 50 EA) **\$18.09**

Grit size 150.

5350-00-192-5050 PG (contains 50 EA) **\$18.09**

Grit size 180.

5350-00-187-6280 J WOOD RO (contains 50 YD) **\$14.21**

5350-00-192-5051 PG (contains 50 EA) **\$18.09**

Grit size 240.

5350-00-161-9715 PG (contains 50 EA) **\$18.09**

Grit size 320.

5350-00-246-0330 PG (contains 50 EA) **\$18.09**

Crocus Cloth

Give metal surfaces a high polish with this crocus cloth. Made of ferric oxide and quartz abrasive glue bonded to jean cloth; closed coat.

5350-00-221-0872 9 x 11" PG (contains 50 SH) **\$25.98**

Emery Cloth

Closed-coat emery cloth.

Has a jean cloth backing.

Medium grit.

5350-00-584-4653 PG (contains 50 EA) **\$20.04**

Fine grit.

5350-00-584-4654 PG (contains 50 EA) **\$20.04**

Garnet Paper

Abrasive paper is clean, crushed, hard, fast-cutting garnet. Use for hand sanding on soft wood. Has an animal hide glue bond.

Heavyweight paper is less flexible and has a rope or wood fiber backing. Each sheet measures 9 x 11".

Closed coat.

5350-00-186-8821 Grit size 150 PG (contains 100 EA) **\$11.42**

Finishing-grade paper has a flexible, lightweight rope or wood fiber paper backing; open coat. Each sheet measures 9 x 11".

5350-00-221-0883 Grit size 80 PG (contains 100 EA) **\$8.40**

Silicon Carbide Paper

Waterproof for wet or dry sanding of metal or wood. Silicon carbide paper has an oil- or varnish-based adhesive and a paper backing. Each sheet measures 9 x 11".

5350-00-619-9167 Grit size 80 PG (contains 50 EA) **\$11.67**

5350-00-721-8115 Grit size 120 PG (contains 50 EA) **\$9.23**

5350-00-224-7201 Grit size 400 PG (contains 50 EA) **\$6.29**

5350-00-224-7215 Grit size 600 PG (contains 50 EA) **\$7.46**

**GSA Customer Supply Center - Making It
Easier For You**

Steel Wool

Multipurpose steel wool can be used to smooth, clean and polish floors and furniture; scour pots and pans; and remove rust, paint and varnish. Packaged in roll form.

Medium (Type II)

5130-00-242-4405 LB \$2.91

Course (Type V)

5130-00-242-4403 LB \$2.42

ELECTRIC/BATTERY**Band Saw**

Heavy-duty portable electric band saw has worm gear and chain drive with 100% ball and needle bearings. Accommodates band blades 44-7/8" long, 1/2" wide and 0.020" thick. Saw has a two-speed switch and operates on 120v AC/DC with 4.5-amp rating at low no-load speed of 195 sfpm and 6.5-amp rating at high no-load speed of 245 sfpm. Saw has closed-end handle at back and auxiliary control at front. Saw has cutting capacity up to 3-3/8" in metal stock and up to 3-3/8 x 4-1/8" in rectangular metal stock. Saw is furnished with one bi-metal blade, operating instructions and a carrying case. Weighs 17 lb maximum with a maximum length of 20".

5130-01-008-7418 EA \$336.60

Saw is electromagnetic-interference suppressed (EMI). Includes a total of nine additional bi-metal blades: three each of 10, 14 and 18 teeth per inch.

5130-00-903-2510 EA \$537.99

Belt Sander

Portable sander has an attached dust-collecting system that includes a fan, vacuum duct and removable dust bag. Replace belts and adjust tension easily. Has a closed-grip handle on rear and a front-grip knob. Electric motor operates at 115v AC/DC, with an on/off trigger switch and a three-wire plug. UL approved. 00-S-90.

Belt is 4" wide and 24" long and has an 1100 to 1900' per minute no-load speed. Nine minimum rated amps.

5130-00-596-9714 8 x 13 x 22" EA \$227.64



Belt is 3" wide and 24" long and has an 1100 to 1700' per minute no-load speed. Seven minimum rated amps.

Electromagnetic interference-suppressed tool.

5130-00-889-8986 EA \$239.00

No EMI suppression.

5130-00-596-9725 EA \$221.42


Your supply solution for...

*** Office supplies**

*** Industrial-quality tools**

*** Commercial cleaning products**

Circular Saw

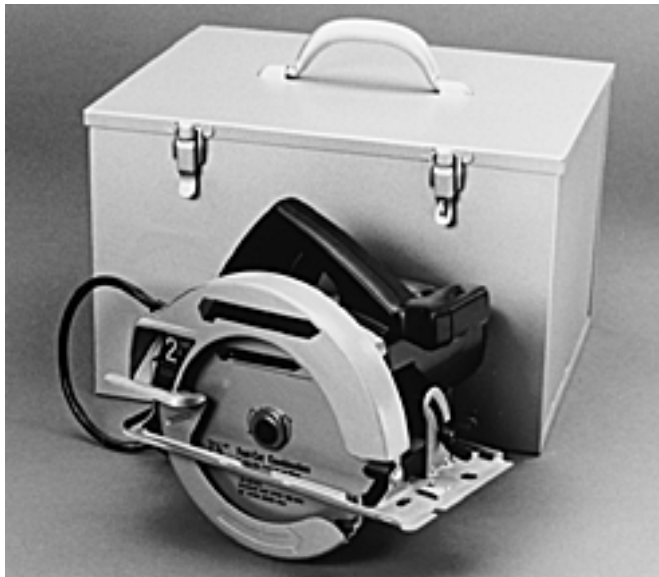

Portable electric circular saw features adjustable metal base for depth and angle of cut adjustment, adjustable rip fence, position indicator, round arbor, dust blower, trigger switch in a comfortable handle and antikick-back clutch. Saw operates on 120v AC/DC. Furnished in a carrying case with one blade, arbor nut wrenches and operating instructions.

Motor armature axis is parallel to blade spindle axis.

Has a minimum no-load speed of 5200 rpm, 1/2 hp a rated current of 13 amp and a round 5/8"-diameter arbor hole. Minimum cut at 90 deg. is 2-3/8"; maximum cut at 45 deg. is 1-3/4". No EMI. Size No. 7.

5130-00-089-3353 7 to 7-1/4" blade diameter EA **\$134.54**

Has a minimum 3800 no-load rpm, a rated current of 15 amp and 5/8"-diameter arbor hole. Minimum cut at 90 deg. is 3-3/8"; maximum cut at 45 deg. is 2-1/4". EMI suppressed. Size No. 10.

5130-00-889-8991 EA **\$633.33**


Has a minimum no-load speed of 5000 rpm, 3/4 hp, a rated current of 13 amp and a round 5/8"-diameter arbor hole. Minimum cut at 90 deg. is 2-5/8"; maximum cut at 45 deg. is 1-7/8". No EMI. Size No. 8.

5130-00-089-3354 8 to 8-1/4" blade diameter EA **\$166.59**

Has minimum no-load speed of 3800 rpm, 1-1/8 hp, a rated current of 15 amp and a 5/8"-diameter arbor hole. Minimum cut at 90 deg. is 3-3/8"; maximum cut at 45 deg. is 2-1/4". No EMI. Size No. 10.

5130-01-087-6842 10 to 10-1/4" blade diameter EA **\$457.06**

Let GSA be your source for everything from office supplies to industrial cleaners. If we don't have what you're looking for, complete the New Item mailer at the back of the catalog and let us know!

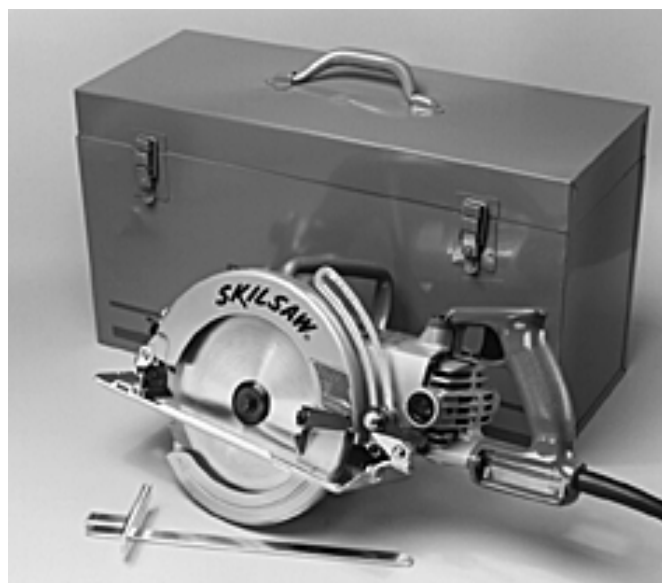

Motor armature axis is at a right angle to blade spindle axis.

Electromagnetic interference-suppressed tool has a minimum no-load speed of 4200 rpm, 3/4 hp, a rated current of 9 amp and a round 5/8"-diameter arbor hole. Minimum cut at 90 deg. is 2-5/8"; maximum cut at 45 deg. is 1-7/8". EMI suppressed. Size No. 8.

5130-00-490-1380 8 to 8-1/4" blade diameter EA **\$280.48**

Cordless Screwdriver/Drill



Hi-torque 12v cordless screwdriver/drill is variable speed and reversible (VSR), has a five-position torque selector, and a low (0 - 300 and 0 - 700 rpm) and high (0 - 900 and 0 - 2000 rpm) speed selector. The screwdriver/drill has a 3/8" keyed chuck which accepts both round-shank drill bits and hexagonal screwdriver bits. Furnished with two 12v removable battery packs, a heavy-duty 120v input one-hour battery charger and a set of instructions. The kit comes in a metal or plastic carrying case.

5130-01-284-3063 EA **\$197.86**



2.4v cordless electric screwdriver features adjustable two-position handle from straight to pistol-grip style, six-position adjustable clutch ranging from 3 to 25 in-lb torque, forward/reverse button with switch lock feature and two-speed selector switch (high 400 rpm and low 200 rpm). Has 1-1/2" body diameter and is 9-1/2" long. Includes a 2.4v rechargeable battery pack, one hour charger with light indicator, three bits (No. 1 and 2 Phillips and 3/16 slotted), storage compartment for bits and instruction manual.

5130-01-306-8384

1/4" hexagonal collet

EA \$100.77

You may submit your order by phone, FAX, e-mail, ROCS or GSA Advantage!, whichever is most convenient for you.

Disk Sander



Heavy-duty sander uses 7"-diameter abrasive disks and wheels and has a 12-amp rating at 120 VAC and a 6000-rpm no-load speed. Sander has a right-angle drive, 5/8-11" spindle thread diameter size, end handle and a two-position side handle for mounting either right or left of spindle. A back-up pad is not included but can be ordered separately (see Sanding Disk Holder 5130-00-357-2301). Sander converts to a grinder by using a grinding wheel and a proper wheel guard, neither of which is included and must be obtained from the manufacturer.

5130-00-596-9728

EA \$183.31

Buy Smart and Pay Smart with the new GSA SmartPay card, or your GSA charge account.

Drill



Medium-speed, standard-duty drills perform light-duty and intermittent heavy-duty drilling. Drills conform to UL Standards. Drill size, drive type, handle design, electrical ratings, maximum no-load speed, minimum rated-load torque, maximum weight and length and other features are listed below.

Standard-duty, medium-speed (2500-rpm), 90 deg. angle-drive drill has a body-type handle with a nonlocking instant release-type switch. Rated 1.3 amp minimum and has 0.3 ft-lb torque. W-D-661.

5130-00-807-3009

EA \$102.15



Standard-duty, medium-speed (2500-rpm) drill has a pistol-grip handle. Rated 1.8 amp minimum and has 3.0 ft-lb torque. W-D-661.

5130-00-293-1846

EA \$68.76


Heavy-duty, medium-speed (1200-rpm) drill has a closed-grip (D) handle. Electromagnetic Interference-Suppressed tool. Rated 3.5 amp minimum and has 3.0 ft-lb torque. W-D-661.

Furnished with a vertical stand. Stand consists of a base, column, mounting fixture and a lever. Stand has 4-5/8" capacity swing, 2-1/2" feed, 50 sq in. base and 12" column vertical adjustment.

5130-00-473-6224

EA \$259.90

**We accept the new GSA SmartPay
credit card.**

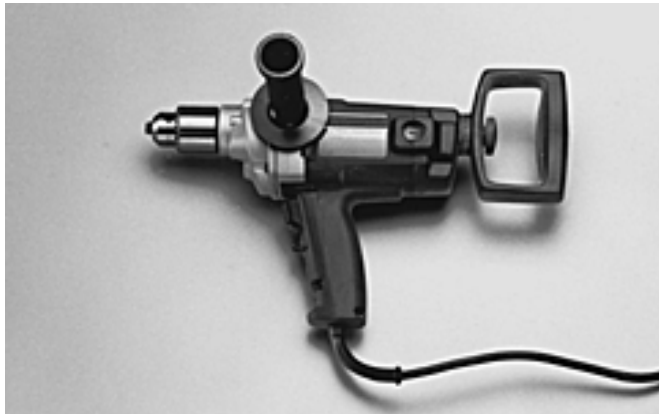

Heavy-duty, medium-speed (650-rpm) drill has a spade-end handle with breastplate for breast drilling and auxiliary side handle. Rated 6.0 amp minimum and has 5.5 ft-lb torque. 1/2" chuck. W-D-661.

Electromagnetic Interference-Suppressed tool.

5130-00-889-9004

EA \$134.10



Heavy-duty, medium-speed (325- to 550-rpm) drill has an adjustable spade-end handle and a removable auxiliary side handle. Drill is double insulated or three-wire grounded with machine-cut gears and ball and roller bearings. Drill weighs 20 lb, is furnished with an 8' cord and operates at 115v, rated at 10 amp. Drill has an AC/DC-rated trigger switch with lock-on mechanism and comes with a manual. Conforms to UL standards.

Reversible drill is furnished with a No. 2 Morse Taper socket and a vertical stand with a spring-return lever. Stand allows 12 vertical travel and 80 sq in. base. Drill and stand weigh 100 lb without the side handle.

5130-01-087-6835

EA \$984.05

Heavy-duty, medium-speed (650-rpm) drill has a spade-end handle with breastplate for breast drilling and auxiliary side handle. Rated 6.0 amp minimum and has 4.7 ft-lb torque. W-D-661.

5130-00-293-1849

EA \$179.76



Portable, reversible, heavy-duty, straight-drive drill converts to a clutch screwdriver and is double insulated with a two-prong plug or grounded with a three-prong plug. Maximum no-load speed (rpm) 0-1000, 0-1400, Minimum amps 5.0, pistol grip handle. Drill type-Heavy.

5130-00-142-5325

EA \$102.15



Prevent shock with this double-insulated, portable, reversible, straight-drive, variable-speed drill. Rated 5 amp at 120v AC, 60-Hz power and includes a key-operated three-jaw chuck. Heavy-duty drill has a 550- to 900-rpm no-load speed. Drill is equipped with a pistol-grip with a removable auxiliary side handle. Comes with an instruction book, parts list and chuck key. Conforms to UL standards.

5130-00-283-3231

EA \$88.53



Portable, reversible, heavy-duty, straight-drive drill has a removable auxiliary side handle and a trigger lock-on button. Double insulated. Converts to a clutch screwdriver. Has a 0- to 1000-rpm and 0- to 1400-rpm no-load speed. Operates on 120v, 60-Hz current at 5 amp. Has a key-operated, three-jaw chuck. Comes with an instruction book and a chuck key with holder. Conforms to UL standards.

5130-00-935-7354

EA \$80.67

Portable, reversible, standard-duty, straight-drive drill has variable speeds and is double insulated to prevent shock. Has a 0- to 1700- to 0- to 2500-rpm no-load speed. Operates on 120v, 60-Hz AC at a rated current of 5 amp. Has a key-operated three-jaw chuck and a pistol-grip handle. Trigger switch has a locking button. Conforms to UL standards.

5130-00-935-7355

EA \$173.57

Portable electric drills have straight drives and may be single or variable speed and capable of reversing. Drills are double insulated unless otherwise noted, operate on 115 to 120v AC and include a key-operated three-jaw chuck. They also come with an instruction book, parts list and chuck key. All conform to UL standards, have minimum torque, amperage rating and maximum weight.

Heavy-duty drill has 200- to 400-rpm rated load range speed and a closed-grip handle with a removable auxiliary side handle. Rated 5.0 amp minimum and has 5.5 ft-lb minimum torque. W-D-1114.

5130-00-901-7585

EA \$175.14

Cordless, 12v, 3/8 reversible drill comes with two power packs, charger and carrying case. It has two variable speed ranges, 400 - 1300 rpm and a keyless chuck. Black & Decker Corp P/N DW972K-2.

5130-01-363-2559

EA \$185.18

**We provide desktop delivery in 1-5 days
to most customers.**

Electric Router



Get the work done right. Has a 1/4" collet chuck and a 7/8-hp electric motor with ball-bearing construction. Operates on 120v AC power. Has 20,000-rpm minimum no-load speed, depth adjustment and two handgrips. Also included are straight and circular cutting guides, case, manual, parts list and two collet wrenches. Conforms to UL 45.

5130-00-035-6160

EA \$144.14

Router has an all ball-bearing construction with 1-1/2 minimum hp, 6"-diameter round base and two control knobs. Operates on 115v, 10 amp and 23,000-rpm minimum no-load speed. Weighs 9 lb. Furnished with 1/4 and 1/2" collets, manuals and collet wrenches. (Edge guides are available in Federal Supply Schedule 51 Part VI, Class 5130, SIN 550-3A.) Porter-Cable P/N 690, Robert Bosch P/N 1604 or equal.

5130-00-962-9690

EA \$166.44

Power tool cuts away unwanted wood, rounds stair tread, prepares inlaying and more by use of various router bits. The 1/4" collet chuck securely locks 1/4" round shank bit and attachments. Double-insulated, single-speed router operates on a 1-hp, 120v AC electric motor with a two-wire cord. Has 24,000- to 26,000-rpm no-load speed. Accessories include 1/4"-diameter grinding-wheel arbor; grinding wheel with 1-1/2" diameter, 1/8"-thick and 1/4" arbor hole; butt-hinge mortising bit with 1/2"-wide, 13/32"-deep and 1/4" shank; and butt-hinge template guide. Also includes handbook, two handgrips, two collet wrenches and accessory parts list. Tool is electromagnetic interference suppressed. Bosch P/N 1601A or equal.

5130-00-990-4450

EA \$221.95

Hammer Drill



Heavy-duty, reversible drill-hammer has variable speed and accommodates 1" diameter drill bit capacity. Accepts SDS bits. Has two modes of operation: hammer with rotation for concrete/masonry or rotation only with chuck for wood/steel. Provided with three-wire power cord, depth rod gauge, adjustable 360 deg. side handle and carrying case. Motor operates on 115/120v AC with a current of 5.6 to 6.0 amp. Has 900 rpm and 4500 no-load impacts per minute. Hilti P/N TE24, Milwaukee Electric P/N 5362-1.

5130-00-138-5552

EA \$486.47

**Use the shipping ticket that
accompanies your order to
verify quantities and prices of
orders received.**

Impact Wrench

Electric impact wrench is double insulated and reversible. Operates on 120v AC. Rated 4.0 amps. Develops 120 ft-lb torque at 1600 rpm and 2000 impacts per minute. Has pistol-grip handle. Maximum weight is 7 lb. Comes in carrying case. Square spindle drive is 1/2". UL listed.

5130-00-940-7065

EA \$202.75

What's Best Value?

"We think best value is a combination of service, quality and price, and that's how we define the Customer Supply Center program."



Has a 3/8" bolt capacity and a spindle offset of 1-1/2". Operates at 1750 rpm, 1700 impacts per minute and 100 ft-lb torque. Accessories include bit holder with 5/16 hexagonal opening; male hexagonal-tip screwdriver bits with tip widths 3/16, 7/32, 1/4, 5/16 and 3/8"; Phillips cross-tip screwdriver bits with tip size No. 2, 3 and 4; flat-tip screwdriver bit with tip width 5/16"; six-point, regular-length socket wrench sockets with wrench openings 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16 and 1"; socket wrench universal joint; two socket wrench extensions with lengths of 5 and 10; and socket wrench extension adapter. Square spindle drive is 1/2". W-W-650.

5130-00-221-0607

EA \$454.54

Cordless impact wrench delivers 2650 blows per minute and a tightening torque of 50-ft-lb. Set includes impact wrench, 9.6v battery pack and battery charger. Snap-on Tool P/N CT30.

5130-01-363-2560

EA \$211.59

Jigsaw

Heavy-duty jig saw accommodates 1/4" universal shank blades. Saw has a 1" stroke length and a closed D top handle for easy handling. Motor operates at variable speed with a no load speed range 0-3100 strokes per minute and has rated current at 4.0 amps at 120v, 60 Hz. Furnished with blades and accessories.

5130-00-889-7745

EA \$138.92

Jigsaw Blade


Replacement blade for most portable electric or pneumatic jigsaws. Blade has a 1/4" universal shank. GG-B-425.

Metal-cutting blade.

Blade has 14 to 18 teeth per inch and measures 2-7/8" long.

5130-00-967-9708

PG (contains 10 EA) \$7.23

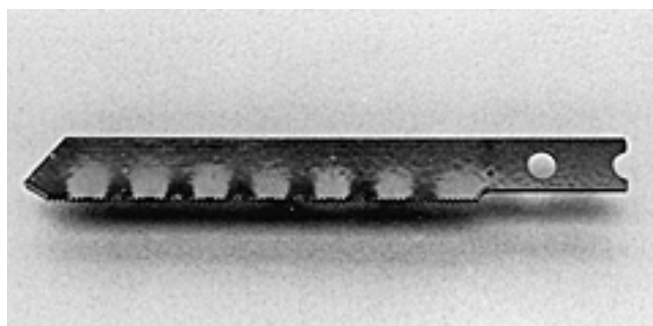*Blade has 32 teeth per inch and measures 2-1/2" long.*

5130-00-967-9707

PG (contains 10 EA) \$6.77

Wood-cutting blade.

Blade has 10 to 12 teeth per inch and measures 2-7/8" long.

5130-00-086-0133

PG (contains 10 EA) \$6.55

Keyless-Chuck Drill

Professional-quality keyless-chuck, portable drill is Jacobs Hand-Tite type.

5130-01-390-2395

3/8" size

EA \$16.19

Nut Driver and Screwdriver (Electric)



Portable and easy to use. Electric tool operates on 120v AC, rated at 4.0 amps per minute. Tool is reversible and has an instant release switch and variable speeds: no-load speed rated at 0 to 1800 rpm minimum and 0 to 2500 rpm maximum. Has a 1/4" hexagonal female straight drive with a positive-type clutch and pistol-grip handle. Furnished with a Phillips No. 2 bit and 5/16" and 3/8" hexagonal sockets. Conforms to UL standards.

5130-00-177-7085

EA \$95.34

Oscillating Pad Sander

Oscillating pad (orbital) sander is for finish sanding of wood and other materials. Sander has all ball bearings and is double insulated. Sander operates on 120v AC.

Has a 1/3-sheet sander size, 3-5/8 x 7-15/16" pad size, 9,000 orbits per minute no-load speed, 1/8" orbit diameter, 1.2-amp rating and a full grip at rear with assist handle at front. 6 foot cord. UL 45 listed or certified conforming to UL 45.

5130-00-596-9727

EA \$95.27

Has a 1/3-sheet sander size, 3-5/8 x 7-15/16" pad size, 9,000 orbits per minute no-load speed, 1/8" orbit diameter, 1.2-amp rating and a full grip at rear with assist handle at front. 6' cord. UL 45 listed or certified conforming to UL 45.

5130-00-990-5238

EA \$34.04

Plane



Heavy-duty plane is for woodcutting. With ball bearing and high-speed steel spiral cutter. Minimum cutting width is 3", maximum cutting depth is 1/8". Motor operates on 120v AC/DC, 25 to 60 Hz, 10 amp and is rated 1-1/2 hp. Includes a three-wire grounded plug. With a 16,000-rpm no-load speed. Has a D-shaped handle and a knob-type handgrip that holds and guides plane. Adjustable fence for bevel cuts up to 45 deg.. Comes with carrying case and handbook.

5130-00-142-5282

EA \$498.66

Reciprocating Saw



Suited for general-purpose uses, such as sawing steel, sheet metal, brass, aluminum, wood and other materials. Portable, electric-powered saw operates on 115v AC/DC power and has either a grounded plug or double insulation. Has a comfortable, closed-grip handle with a trigger switch. Chuck holds blade securely. Furnished with recommended blades and carrying case.

Single-speed saw has a horizontal (inline) drive. Outputs 1600 to 2400 strokes per minute. W-S-90.

5130-00-819-7767

7/16" stroke, 1/2" wide blade shank

KT \$159.57

Electromagnetic interference-suppressed tool.

5130-00-720-0654

7/16" stroke, 1/2" wide blade shank

EA \$260.75

**We're open 7:30 am to 8:00 pm Eastern time
to take your calls.**

Reciprocating Saw Blade

Replacement blade for use with most portable electric or pneumatic reciprocating saws. Blade has a 1/2" universal shank. GGG-B-425.

Metal-cutting blade.

Blade has 18 teeth per inch and measures 6" long.

5130-00-275-1206

PG (contains 10 EA) \$17.12

Rotary Hammer

Heavy-duty rotary hammer with spline drive accommodates 3/8"- to 1-1/2"-diameter spiral carbide bits and up to 3-1/2"-diameter core bits. Has two modes: hammering only and hammering with rotation. Has a no-load speed of 180 to 360 rpm and a no-load blows per minute of 2500 minimum. Operates on 120v AC and weighs 17 lbs. Furnished in a carrying case with a side handle, a depth rod and operating instructions.

5130-01-365-6507


EA \$606.70

Rotary Tool Kit - "Moto-Tool"

Electric rotary tool kit is used for grinding, carving, drilling, sanding, buffing, sawing, deburring, routing, polishing, engraving, sharpening and shaping. The rotary tool has a 2-1/4" body diameter with a collet that accommodates 1/8" diameter shanks. Three additional collets and a collet wrench are also furnished for 1/32, 1/16 and 3/32" diameter shanks. Motor runs at a variable speed from 5000 rpm minimum to 30,000 rpm maximum. The kit also includes 23 accessories consisting of mandrels; mandrel-mounted bristle brushes and sanding drums; ball and cylindrical high-speed steel cutters; mounted and cutting wheels; sanding disks; felt polishers; and dressing stone. Furnished in a carrying case with instruction manual. Dremel Mfg P/N 381 or equal.

5130-01-014-6856

EA \$53.12

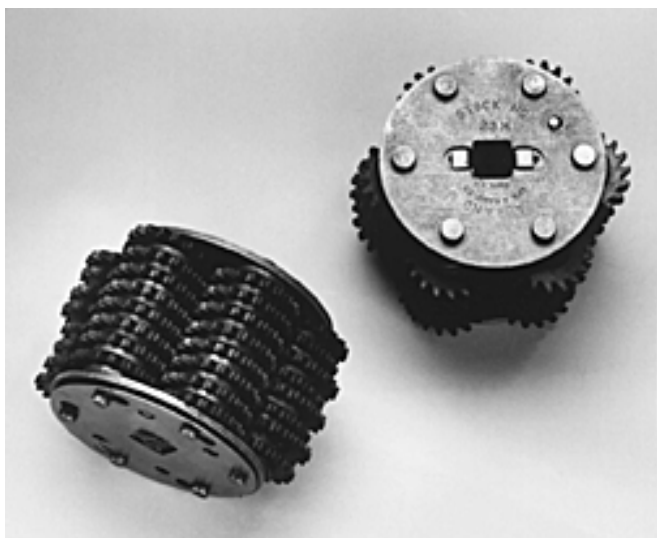Scaling and Chipping Tool Cutter Bundle

Set of two bundles for portable electric rotary scaling and chipping tool. Has a cage design. Consists of cutters, side plates, lock plate, square bearing tube and other parts. Mounting spindle is 1/2" square and rebuildable. Cutters are milled or stamped steel disks with 18 teeth. Measures 1-1/4" in diameter and has a 5/8" bore.

5130-00-287-5199

SE (contains 2 EA) \$60.54

GRIT**Glass Shot**

Commercial glass shot is sieve size and ranges from -70 to +140. Cataphote, Inc. P/N MSMH.

5350-00-028-8854

BG (contains 50 LB) \$26.72

MISCELLANEOUS**Gasoline Circular Saw**

Gasoline engine-driven saw has a 12" blade capacity and cuts in any position. Powered by an air-cooled, single-cylinder, two-cycle gasoline engine, developing 5.5 brake hp at 6000 rpm. High-strength V-belt drive is housed in a safety guard. Has an adjustable blade guard and nontip base stand. Provided with one 12"-diameter, carbide-tipped blade; one 12"-diameter, reinforced, steel-cutting abrasive wheel; one 12"-diameter reinforced concrete abrasive wheel; safety goggles; parts list; instructions; and other accessories. Comes in a metal carrying case.

5130-00-134-1207

EA \$1429.92

PNEUMATIC**Air Hammer Set**

Pneumatic hammer set is for cutting, shearing and punching metal. Tool has a pistol-grip handle and teasing throttle. Accommodates 0.401 shanks. Delivers 3000 blows per minute. Operates on 90 psig and has 1/4" NPT air inlet thread. Furnished with bent-end chisel, inside-outside chisel, splitting chisel, radius panel cutter, panel cutter, tapered punch, scraper, tie rod and ball joint separator, 6" flat chisel, 8" flat chisel, large beehive retaining spring, small beehive retaining spring, carrying case and operating and maintenance instructions.

5130-00-901-8245

EA \$165.39

**For additional copies of this catalog,
call 1 (800) 525-8027.**

Blind Riveter

Installs bolts and rivets. Air-operated, hydraulic piston-action riveter has interchangeable screw-on pulling heads. Designed for continuous operation. Furnished with a carrying case and manuals. Note: In order for the blind riveter to install the specified rivets, the appropriate pulling head(s) must be used. Unless otherwise stated below, pulling heads are not furnished with these tools and must be ordered separately (see Pulling Heads).

Installs 3/32-, 7/64-, 1/8-, 5/32-, 3/16- and 1/4"-diameter heavy-duty pop rivets. Operates at 85 psig of air pressure. Includes one set of jaws and applicable nosepieces. Emhart P/N PRG 540, Air P/N PR-14, Air Speed Tool P/N PR 250, Creative Engineering Model 301.

5130-00-177-6876

12" high

EA \$258.78

**Shipment in 24 hours is our commitment,
with many orders shipped the same day and
delivered the next, with no extra charges
because the prices you see already include
shipping and handling.**

Disk Sander

Heavy-duty sander has right-angle drive and an auxiliary side handle. Holds a 7"-diameter sanding pad. Includes a level throttle, sanding pad, nut, wrench and manual. Spindle thread is 5/8"-11 UNC-2A. Has 3/4-hp rating, 6000-rpm no-load speed and air consumption of 70 surface cu ft per minute. Operating pressure is 90 psig and sander has a 1/4" NPT air inlet connection. A-A-2689.

5130-00-596-1176

EA \$156.56

Disk Sander (Compact)



Sand and grind intricate shapes in close quarters with this right-angle compact air sander and grinder. No-load speed is 20,000 rpm. Sander has lever throttle and 1/4" collet. Operating pressure is 90 psig and sander has a 1/4" NPT air inlet connection. Length is 6". Furnished with 2"-diameter back-up pad and operating and maintenance instructions.

5130-00-340-0719

EA \$98.15

Disk Sander (Dual Action)



Sander pad motion provides a combination oscillation and rotating action to produce a nonrepeating path and a finish free of scratches and swirls. Ideal for finish sanding, shaping and feather edging. Has one-hand lever throttle operation. No-load speed is 8000 - 12000 rpm. Has a 1/4" NPT air inlet connection. Sander has 6"-diameter pad with canvas face. Furnished with operating and maintenance instructions. A-A-2690.

5130-00-204-0623

EA \$116.23

Drill

Air-powered, portable drill is for drilling holes in mild steel and wood or for use with various accessories. Has a 3-jaw chuck. Operating pressure is 90 psig. Air inlet connection is 1/4" NPT. Furnished with operating and maintenance instructions. 00-D-691.

Reversible drill has a pistol-grip handle.

Maximum no-load speed is 1900 rpm.

5130-00-288-7750

EA \$158.47



Maximum no-load speed is 3200 rpm.

5130-00-889-9011

EA \$134.47

Nonreversible drill has a 90 deg.-angle head, a body-grip handle and a lever throttle.

Maximum no-load speed is 3500 rpm.

5130-00-293-1977

EA \$233.45

**Need a new item added to the catalog? Complete the
New Item mailer at the back of the catalog.**



Maximum no-load speed is 2000 rpm.

5130-00-540-4434

EA \$307.16

Nonreversible drill has a pistol-grip handle.

Maximum no-load speed is 3200 rpm.

5130-00-294-9511

EA \$117.40



Maximum no-load speed is 1200 rpm.

5130-00-640-6343


EA \$257.31

Maximum no-load speed is 1600 rpm.

5130-00-596-8420

EA \$127.33

Grinder (Die)

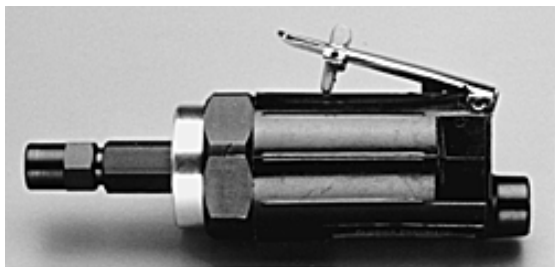

Die grinder is for use with carbide burs and mounted wheels. Grinder has body-grip handle with lever-style throttle. Operating pressure is 90 psig. Furnished with operating and maintenance instructions.

Die grinder is for use with 3/4" carbide burr and 1-1/2" mounted wheel. Has 20,000-rpm no-load speed, 1/4" collet, built-in speed regulator, aluminum housing, 1/4" NPT air inlet connection and 6-1/2" length.

5130-00-293-2797

EA \$74.15

Die grinder is for use with 1/2" carbide burr and 1-3/4" mounted wheel. Has 12,000-rpm no-load speed, lever-style throttle, 3/8"-24 UNF spindle thread, built-in speed regulator, 1/4" NPT air inlet connection and 8-1/8" length. Furnished with wheel guard.

5130-00-880-4587

EA \$175.77

**Check out our expanded
inventory. We're growing to
meet your needs!**

Impact Wrench




Air-powered portable impact wrench loosens and tightens bolts and nuts. Has built-in power regulator for control of power output. Tool is reversible. Operating pressure is 90 psig. Note: Closed-grip handle style has inside trigger and removable dead handle. Furnished with operating and maintenance instructions.

Has a closed-grip handle. Air inlet connection is 1/2" NPT. A-A-2691.

5130-00-184-1426

1" square male drive, 1600 ft-lb torque

EA \$990.17

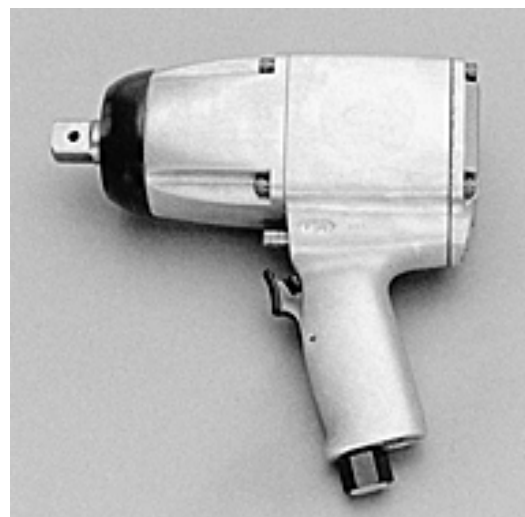

Has a pistol-grip handle. A-A-2678.

Air inlet connection is 3/8" NPT.

5130-00-184-1427


3/4" square male drive, 750 ft-lb torque

EA \$310.22



Air inlet connection is 1/4" NPT.

5130-00-234-4879 3/8" square male drive, 70 ft-lb torque EA **\$118.55**

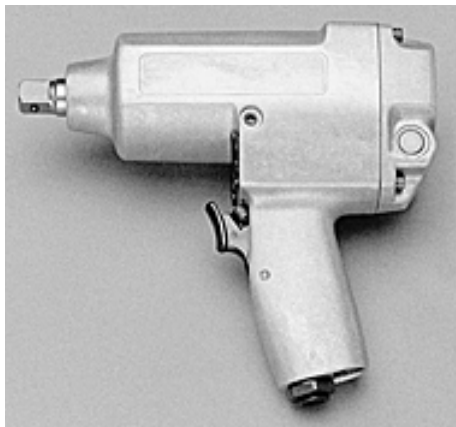

5130-00-889-2134 1/2" square male drive, 250 ft-lb torque EA **\$113.74**

Has a body-grip handle. Air inlet connection is 1/4" NPT. A-A-2692.

5130-00-234-4881 3/8" square male drive, 50 ft-lb torque EA **\$151.65**

Has a body-grip handle. Air inlet connection is 1/4" NPT. FED SPEC OO-W-891E.

5130-00-057-9738 1/2" square male drive EA **\$353.59**

Needle Scaler



Remove paint, rust and scale from flat and irregular surfaces with this portable air-operated needle scaler. Operating pressure is 90 psig. Tool has nineteen 1/8"-diameter needles and a round needle housing. Air inlet connection is 1/4" NPT. Includes operating and maintenance instructions. MIL-S-23492.

Scaler has pistol-grip handle and button throttle. Size 2. Measures 20" long and weighs 8-1/2 lb.

5130-00-965-9876 EA **\$114.95**



Scaler has inline handle and lever throttle.

Size 1. Measures 19" long and weighs 6 lb.

5130-01-029-8042 EA **\$225.77**

As a valued GSA customer, your comments are important to us!
Please fill out and return the Comment Card at the back of the catalog.

Oscillating Sander



Orbital-action air sander is for metal or wood finishing jobs. No-load speed is 6000 to 9000 orbits per minute. Paper size is 3 x 8". Abrasive area is 18 sq in. Has a palm-driven lever throttle with finger grip housing. Has neoprene rubber pad and 1/4" air inlet connection. Furnished with operating and maintenance instructions. A-A-2687.9.

5130-00-606-9694 EA **\$115.97**

Panel Saw

Panel saw is for cutting plastics, aluminum, brass, masonite, drywall, plywood and light-gauge steel. Saw has pistol-grip handle. Operating pressure is 90 psig, and saw has a 1/4" NPT air inlet connection. Furnished with operating and maintenance instructions.

Cutting capacity: cuts mild steel up to 18 gauge, aluminum to 1/8" and plastics to full depth of cut. Capacity of saw blade is 1-1/2" diameter, with 2000-rpm no-load speed. Depth of cut is 0 to 1/4". Arbor diameter is 1/4", and the spindle housing is adjustable through 360 deg.. Furnished with six 1-1/2" blades: three with 44 teeth and three with 60 teeth.

5130-00-343-8945

EA \$299.29

Pulling Head

Pulling head is used on pneumatic riveters to install rivets.

Installs 1/8-, 5/32- and 3/16"-diameter Cherrymax rivets when attached to Cherry P/N G-701, G-704 or G-746 air-operated riveters and G-749 hand riveters.

Straight pulling head. Cherry P/N H701B-456, GBP P/N 456MAX-701-17, Allfast P/N RV815 or equal.

5130-01-044-7197

EA \$65.38

Rivet Shaver

Portable pneumatic rivet shaver cleanly and precisely shaves aluminum, aluminum alloy, copper, brass and mild steel rivets with diameters up to 3/4". Shaver has a pistol-grip handle and stabilizer. Skirt and cutter size capacities are 5/16 to 3/4". Depth of cut adjustments are in increments of 0.001". Operating pressure is 90 psig and air inlet connection is 1/4" NPT. Furnished with seven cutters and seven skirts in the following sizes: 5/16, 3/8, 7/16, 1/2, 9/16, 5/8 and 3/4". Carrying case and operating maintenance instructions are included. MIL-S-4243.

5130-00-621-2647

EA \$520.77

Sanding Disk Holder (Back-Up Pad)


Quick-change flexible rubber back-up pad for use with 7 and 9" sanders having 5/8-8-11 UNC spindle thread. Back-up pad accommodates 7" abrasive sanding disks. Maximum safe speed for back-up pad is 8500 rpm. Black & Decker P/N 50940 or equal.

5130-00-357-2301

EA \$25.17

SANDERS/GRINDERS

Abrasive Mat

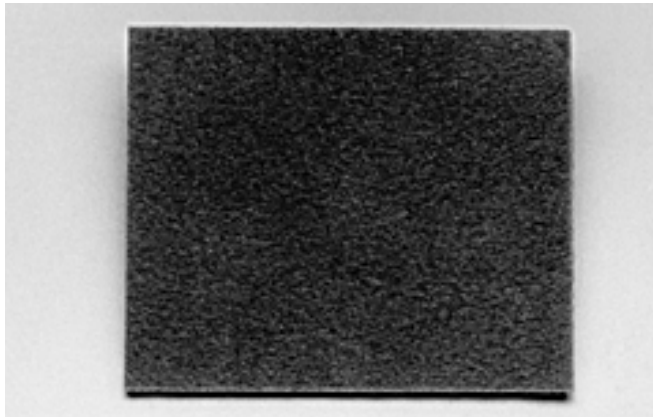

Use nylon (nonwoven) aluminum oxide mat manually or with oscillating machine to give a high gloss finish, remove stock or prepare surfaces for paint. Bonded with a waterproof adhesive. Has coated sides and edges. Measures 9 x 11 x 1/16".


5350-00-967-5093 J WOOD Grit size 100 to 150 SH \$12.54

Abrasive Disk Kit

Kit contains an assortment of 1-, 2- and 3"-diameter resin bond disks in various grit sizes and one each 1, 2 and 3" disk holders. Features merit abrasive-style "power-lock" disk-to-pad attachment design.

5345-01-015-1419 KT \$40.14


Abrasive Test Kit

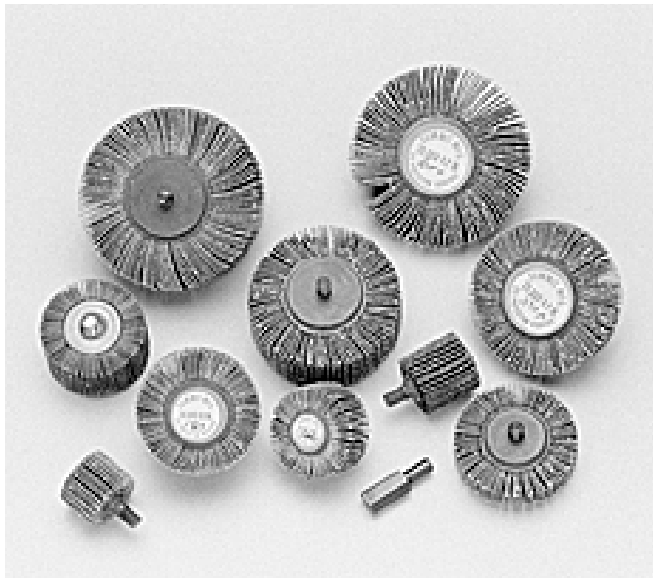

Test kit consists of 10 abrasive flap wheels of various grits, diameters and thicknesses, each with an integral 1/4" shank.

5345-01-122-1170 KT \$31.02

Aluminum Oxide Disk



Use aluminum oxide abrasive disk on portable sanders and drills for polishing, grinding and sanding and for removing paint, scale and rust. Closed coat.

Firmly bonded on a vulcanized fiber backing.

Has a 7" diameter and a 7/8" arbor hole.

5345-00-558-5928 Grit size 24 PG (contains 25 EA) \$13.68

Silicon Carbide Disk

Plain, flat silicon carbide disk is for metalworking and woodworking use. Has a 6" diameter and a pressure-sensitive resin adhesive backing to speed disk changes. No arbor hole; open coat. "A" weight paper backing.

5345-01-053-7925 80 grit RO (contains 125 EA) \$13.87

5345-01-074-9405 120 grit RO (contains 125 EA) \$11.90

5345-01-074-9406 280 grit RO (contains 250 EA) \$21.79

WIRE BRUSHES

Wire Brush (Rotary Circular Flared End)



Solid-filled, circular end brush has flared, crimped wire for side cleaning action. Brush will not score blind hole button. Maximum safe speed is 6000 rpm. Designed for use with portable electric or pneumatic tools.

Fill wire is high-carbon tempered steel. Has a 1/4" shank.

5130-00-595-8179 1-1/4" brush diameter, 0.0080" wire EA \$3.72

Let GSA be your source for everything from office supplies to industrial cleaners. If we don't have what you're looking for, complete the New Item mailer at the back of the catalog and let us know!